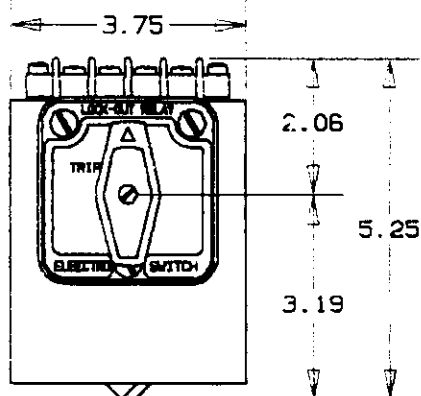
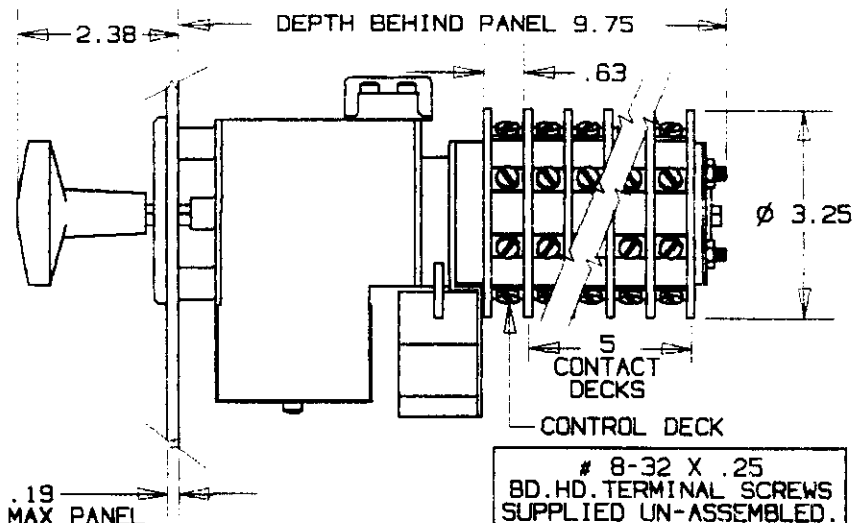



**ELECTROSWITCH**UNIT OF ELECTRO SWITCH CORP.
KEYMOUTH MASSACHUSETTS 02168

TEL: (617) 335-5200 FAX: (617) 335-4253

**SERIES 24
ELECTRIC RESET
LOCKOUT RELAY****7825DD****(3) #10-32 X .56
MOUNTING SCREWS
SUPPLIED****# 8-32 X .25
BD. HD. TERMINAL SCREWS
SUPPLIED UN-ASSEMBLED.**

COIL SPECIFICATIONS	TRIP	RESET
NOMINAL VOLTAGE:	125 VDC	125 VDC
OPERATING RANGE(VDC):	30-140	100-150
THRESHOLD (MIN):	16 VDC	N/A
COIL RESISTANCE:	27 Ω	12.4 Ω
COIL BURDEN (125 VDC):	4.6 AMP	10.1 AMP


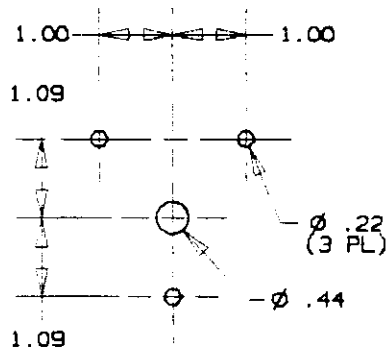
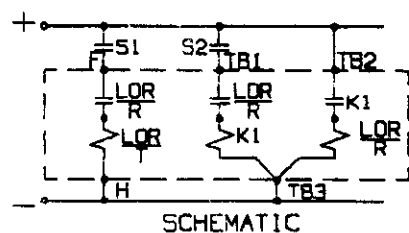
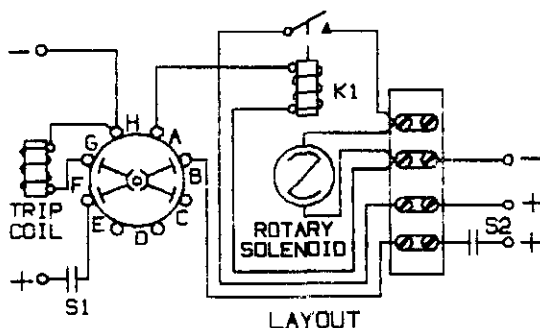
UL RECOGNIZED CONTACT RATINGS	
20A-120VAC	3A-125VDC
15A-240VAC	1A-250VDC
6A-600VAC	

FOR FURTHER INFORMATION
REFER TO TECHNICAL PUBLICATION
LOR-1STANDARD
NAMEPLATE ENGRAVING

CODE 17C-2L22

**TYPICAL CONTACT
DECK LAYOUT**

	CONTACTS		POSITION	
			TRIP	RESET
DECK 1	11	13		X
	12	18	X	
	15	17		X
	14	16	X	

ADDITIONAL CONTACT
DECKS SAME AS DECK 1
EXCEPT TERMINAL NUMBERS.
(DECK 2: 21 TO 28,
DECK 3: 31 TO 38 ETC.)**PANEL DRILLING
DIMENSIONS****CONTROL CIRCUIT**

	CONTACTS		POSITION	
			TRIP	RESET
CONTROL DECK	F0	10G		X
	A0	10B	X	

MADE BY: H.G. DATE: 5/12/72
APPR BY: J.R. DATE: 5/12/72DWG. NO.:
SHEET 1 OF 1REV
F

REVISES: WDS 11/17/92 JR

永岳機電科技有限公司
YONGYEA TECHNOLOGY Ltd

FN-